COLD BAY

LEGEND

Airports having Control Towers are shown in Blue, all others in Magenta. Consult Supplement Alaska for details involving airport lighting, navigation aids, and services. For additional symbol information refer to the Chart User's Guide.

AIRPORTS

Other than hard-surfaced runways — Seaplane Base

Hard-surfaced runways 1500 ft. to 8069 ft. in length

Hard-surfaced runways greater than 8069 ft. or some multiple runways less than 8069 ft.

Open dot within hard-surfaced runway configuration indicates approximate VOR, VOR-DME, or VORTAC location.

All recognizable hard-surfaced runways, including those closed, are shown for visual identification. Airports may be public or private.

ADDITIONAL AIRPORT INFORMATION

Private "(Pvt)" - Non-public use having emergency or landmark value

Military - Other than hard-surfaced; all military airports are identified by abbreviations AFB, NAS, AAF, etc

Heliport Selected — Unverified — Abandoned - paved having landmark value, 3000 ft. or greater — Ultralight Flight Park Selected

Services - fuel available and field tended during normal working hours depicted by use of ticks around basic airport symbol. (Normal working hours are Mon thru Fri 10:00 A.M. to 4:00 P.M. local time.) Consult Supplement Alaska for service availability at airports with hard-surfaced runways greater than 8069 ft.

Rotating airport beacon in operation Sunset to Sunrise

AIRPORT DATA

Box indicates FAR 93 Special Air Traffic Rules & Airport Traffic Patterns. — FSS — FAR 91 — NO SVFR — Location Identifier — NAME (NAM) (PNAM) — ICAO Location Indicator shown outside contiguous U.S.

Runways with Right Traffic Patterns (public use) — CT - 118.3 ★ Ⓒ ATIS 123.8 — 285 L 72 122.95 — RP 23, 34

RP ★ Special conditions exist - see Supplement Alaska. — VFR Advsy 125.0 — UNICOM — WX CAM — Weather Camera (AK) — AOE — Airport of Entry

FSS - Flight Service Station

NO SVFR - Fixed-wing special VFR flight is prohibited.

CT - 118.3 - Control Tower (CT) - primary frequency

★ - Star indicates operation part-time. See tower frequencies tabulation for hours of operation.

Ⓒ - Common Traffic Advisory Frequencies (CTAF)

ATIS 123.8 - Automatic Terminal Information Service

ASOS/AWOS 135.42 - Automated Surface Weather Observing Systems (shown where full-time ATIS not available). Some ASOS/AWOS facilities may not be located at airports.

UNICOM - Aeronautical advisory station

VFR Advsy - VFR Advisory Service shown where full-time ATIS not available and frequency is other than primary CT frequency

285 - Elevation in feet

L - Lighting in operation Sunset to Sunrise

*L - Lighting limitations exist; refer to Supplement Alaska.

72 - Length of longest runway in hundreds of feet; usable length may be less.

When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.

AIRPORT TRAFFIC SERVICE AND AIRSPACE INFORMATION

Only the controlled and reserved airspace effective below 18,000 ft. MSL are shown on this chart. All times are local

Class B Airspace

Class C Airspace (Mode C - see FAR 91.215/AIM)

Class D Airspace

COMMUNICATION BOXES

122.1R 122.6 123.6 — OAKDALE — 362★ OAK — 122.1R — CHICAGO CHI

Underline indicates no voice on frequency.

Crosshatch indicates Shutdown status.

★ - Operates less than continuous or On-Request.

Ⓐ - ASOS/AWOS

Ⓗ - HIWAS

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2, 243.0 and 255.4 (Canada - 121.5, 126.7 and 243.0) are available at many FSSs and are not shown above boxes. All other frequencies are shown.

Certain FSSs provide Airport Advisory Service, see Supplement Alaska.

R - Receive only

RADIO AIDS TO NAVIGATION

OBSTRUCTIONS

TOPOGRAPHIC INFORMATION

MISCELLANEOUS

Parachute Jumping Area (See Supplement Alaska.)

VFR Waypoints (See Supplement Alaska for latitude/longitude.)

Terminal Radar Service Area (TRSA)

MTR - Military Training Route

Non-Perennial Lake — Bridges and Viaducts

COLD BAY
SECTIONAL AERONAUTICAL CHART

SCALE 1:500,000

Lambert Conformal Conic Projection Standard Parallels 49°20' and 54°40'

Horizontal Datum: North American Datum of 1983 (World Geodetic System 1984)

43RD EDITION EFFECTIVE 0901Z 11 FEB 2010 TO 0901Z 10 FEB 2011

Includes airspace amendments effective 11 FEB 2010 and all other aeronautical data received by 17 DEC 2009

Information on this chart will change; consolidated updates of chart changes are available every 56 days in the SUPPLEMENT ALASKA Chart Bulletin section (online at www.naco.faa.gov). Also consult appropriate NOTICES TO AIRMEN (NOTAMs) and other FLIGHT INFORMATION PUBLICATIONS (FLIPs) for the latest changes.

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS, APPROVED BY

DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION



CONTOUR INTERVAL 1000 feet

Intermediate contours shown at 500 feet

Auxiliary contours shown at 250 foot interval

HIGHEST TERRAIN elevation is 9414 feet located at 54°45'N – 163°58'W

Spot elevation •4254

Approximate elevation x3200

Doubtful locations are indicated by omission of the point locator (dot or "x")

CONVERSION OF ELEVATIONS

FEET (Thousands) 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

METERS (Thousands) 0 1 2 3 4 5 6 7 8 9

9414 — GLACIER — 8000 — 7000 — 5000 — 3000 — 2000 — 1000 — Sea Level

NORTH AMERICAN AEROSPACE DEFENSE COMMAND (NORAD) PROCEDURES

All aircraft operating in the U.S. national airspace, if capable, will maintain a listening watch on guard frequencies VHF 121.5 or UHF 243.0. It is incumbent upon all aviators to know and understand their responsibilities if intercepted. Review "AIM" section 5-6-2 for intercept procedures. Additionally, if U.S. military fighter jets intercept an aircraft and flares are dispensed in the area of that aircraft, aviators will pay strict attention, contact air traffic control immediately on the local frequency or on VHF guard 121.5 or UHF 243.0 and follow the interceptor visual ICAO signals. Be advised that non-compliance may result in the use of force.

Published by the U.S. Department of Transportation
Federal Aviation Administration
National Aeronautical Charting Office
www.naco.faa.gov

FAA Product ID: SCB

NSN 7641014099794

NGA REF NO SECXXCOLDBAY
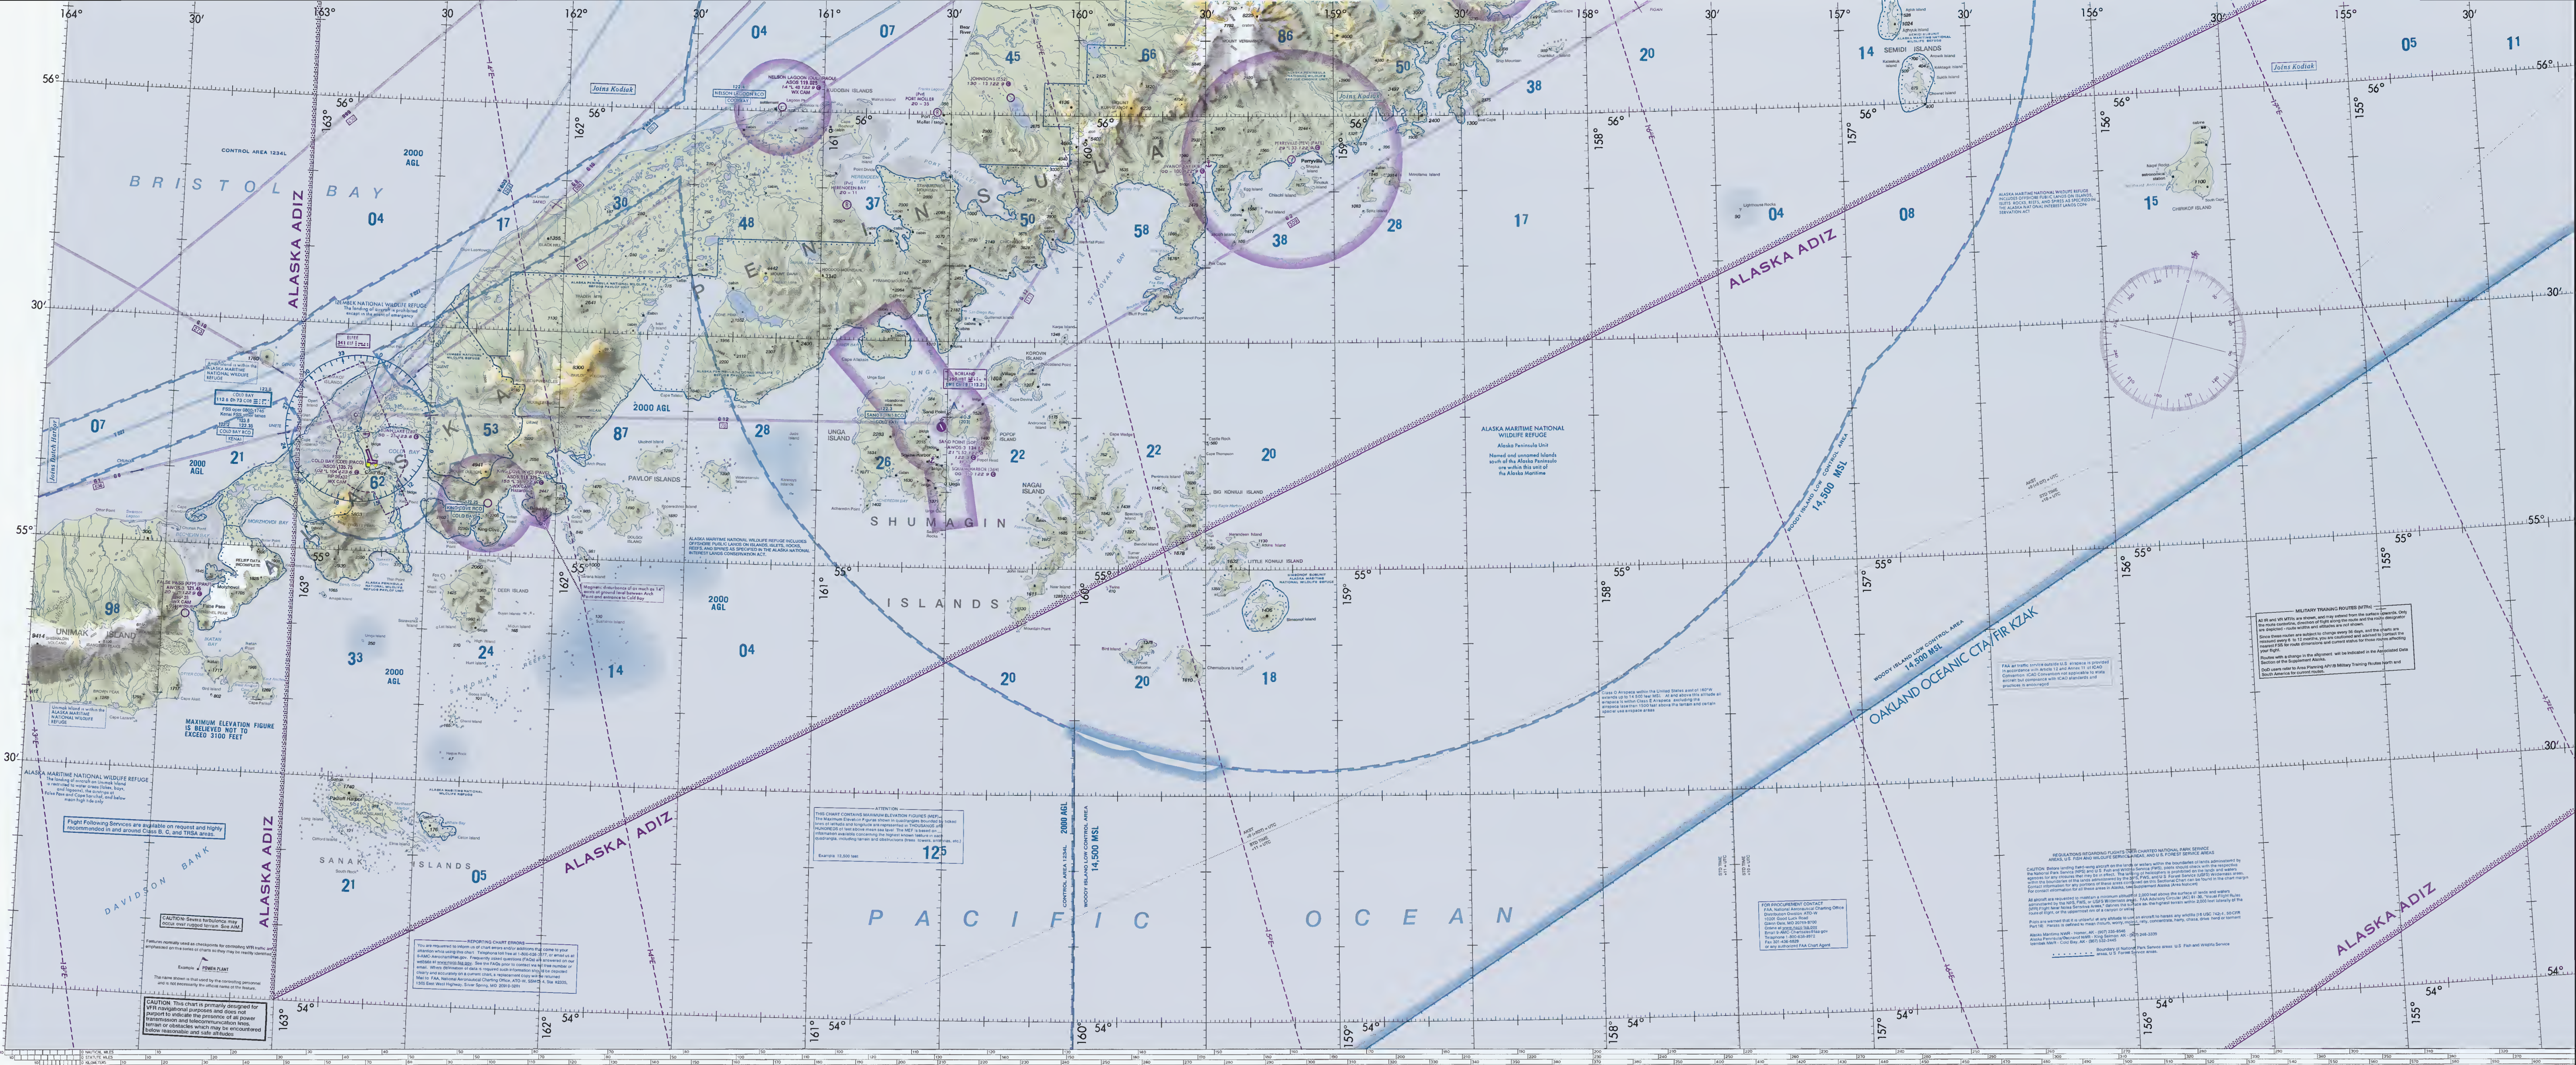
EFF DATE 10042